

PU-22HC


HDMI/CAT5e/6 to HDMI/CAT5e/6 Cascader



The PU-22HC cascader with its dual input and outputs allows for great flexibility within any HDMI over CAT5e/6 system. HDMI signals can be extended up to 40m, and can be cascaded up to three layers.

FEATURES

- v1.3 HDMI, HDCP 1.1 and DVI 1.1 compliant
- HDMI/CAT5e/6 to HDMI/CAT5e/6 Cascader
- Resolutions supported: PC - VGA to SXGA; HDTV - 480i to 1080p plus 1080p24fps
- High Definition Audio supported: Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio plus LPCM
- Supports CEC functions
- CAT I/O can run up to 40m @ 1080p8bit video. HDMI Output can run up to 15m
- Supports Deep Colour (10 & 12 bit)
- Equalises and recovers incoming TMDS data before re-transmitting to ensure optimum signal quality
- CAT output is ideal for cascading to other HDMI products within the PUMA range
- System reset function switch generate a command every 10 minutes to the connected display which resets them to the correct HDMI input
- Selectable EDID settings - TV (downstream) and STD (fixed)
- Supports xvYCC
- Supports 3D signals

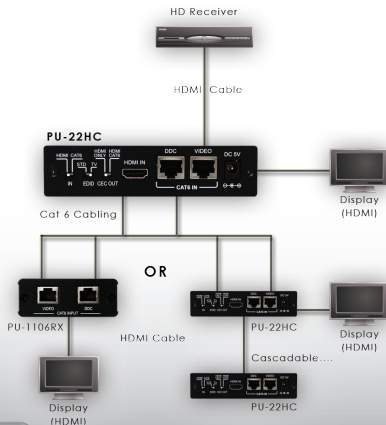

SPECIFICATIONS

Input:	1x HDMI (1x HDMI Uncompressed AV and Data), 2x RJ45 (1x HDMI & Proprietary Data)
Output:	1x HDMI (1x HDMI Uncompressed AV and Data), 2x RJ45 (1x HDMI & Proprietary Data)
Power:	5V/2.6A DC (US/EU standards, CE/FCC/UL certified)
Dimensions:	125mm (W) x 120mm (D) x 30mm (H)
Gross Weight:	700g
Net. Weight:	600g
Packaging:	Boxed

